
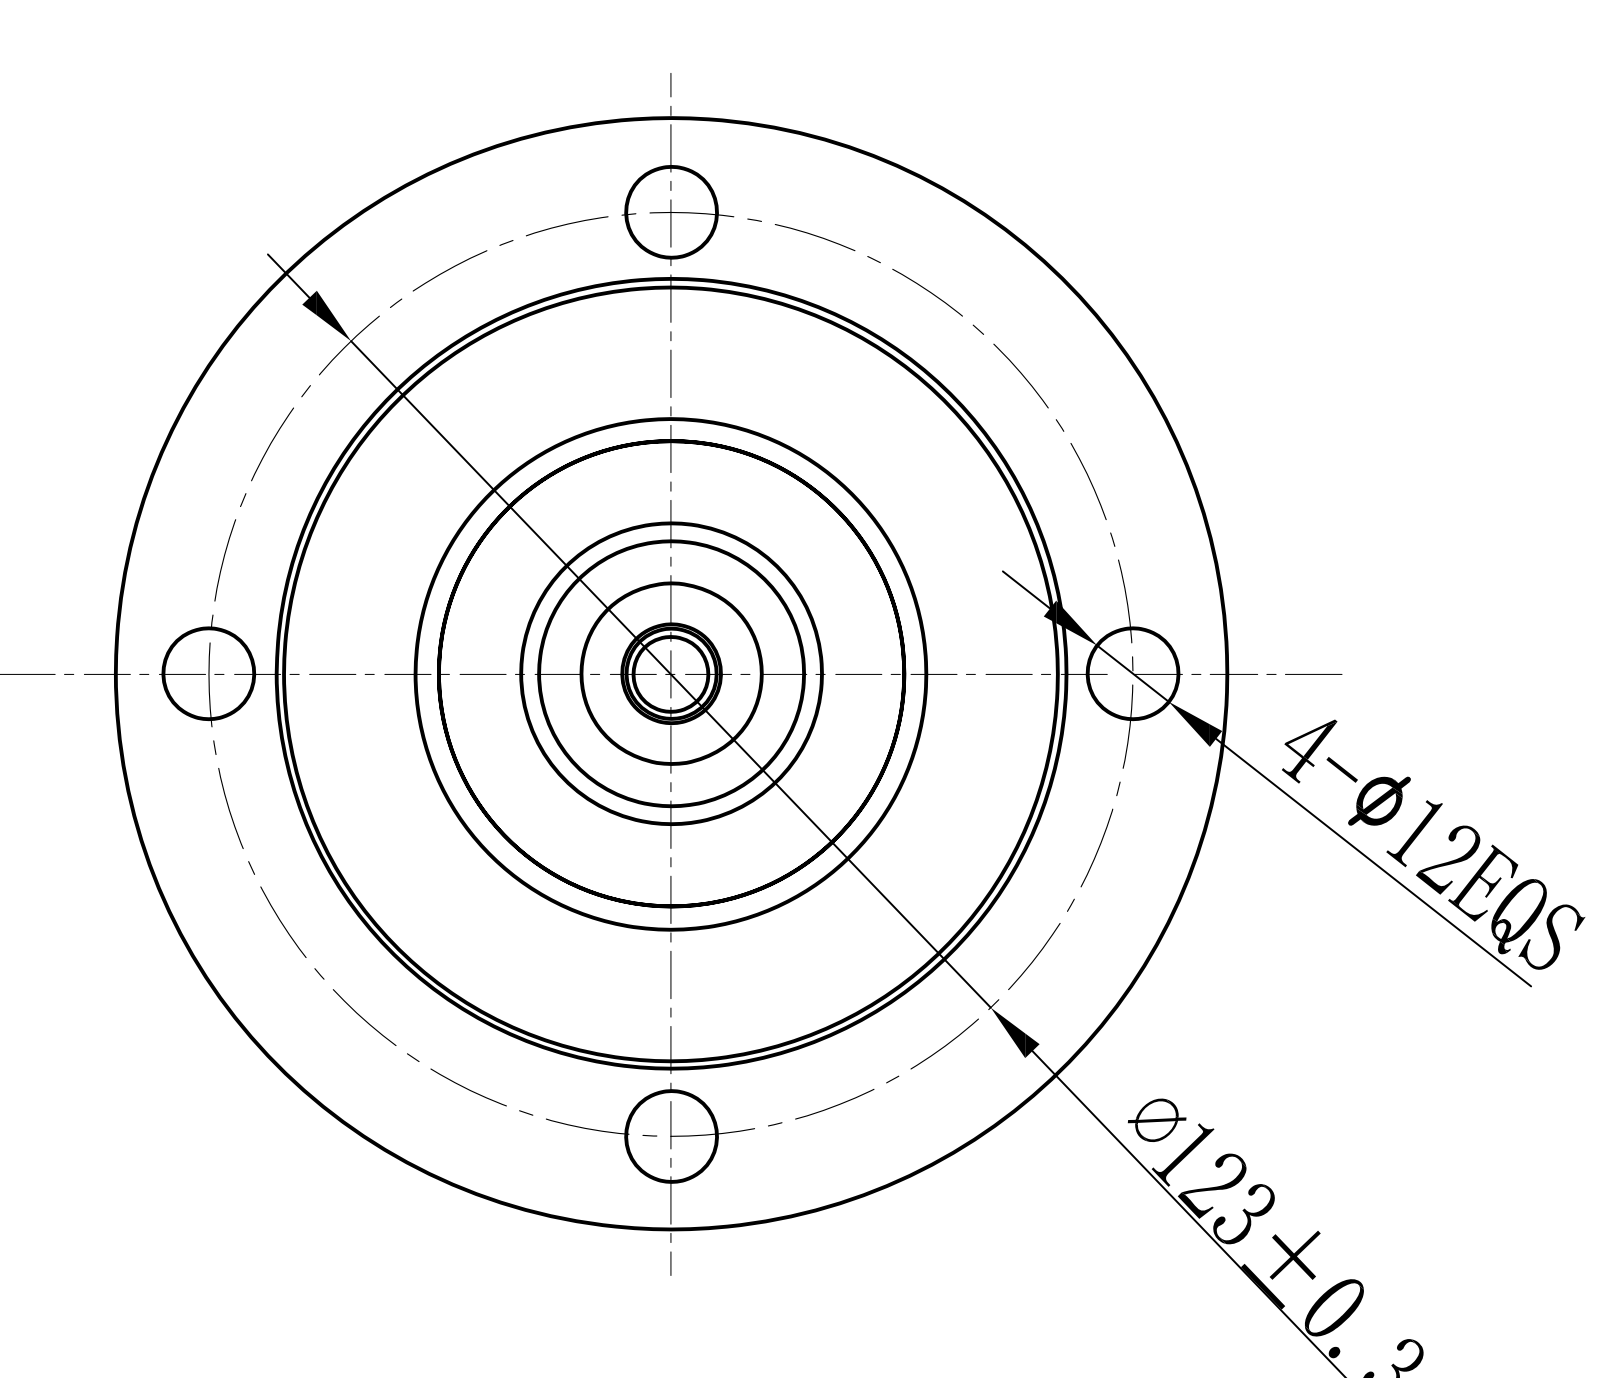


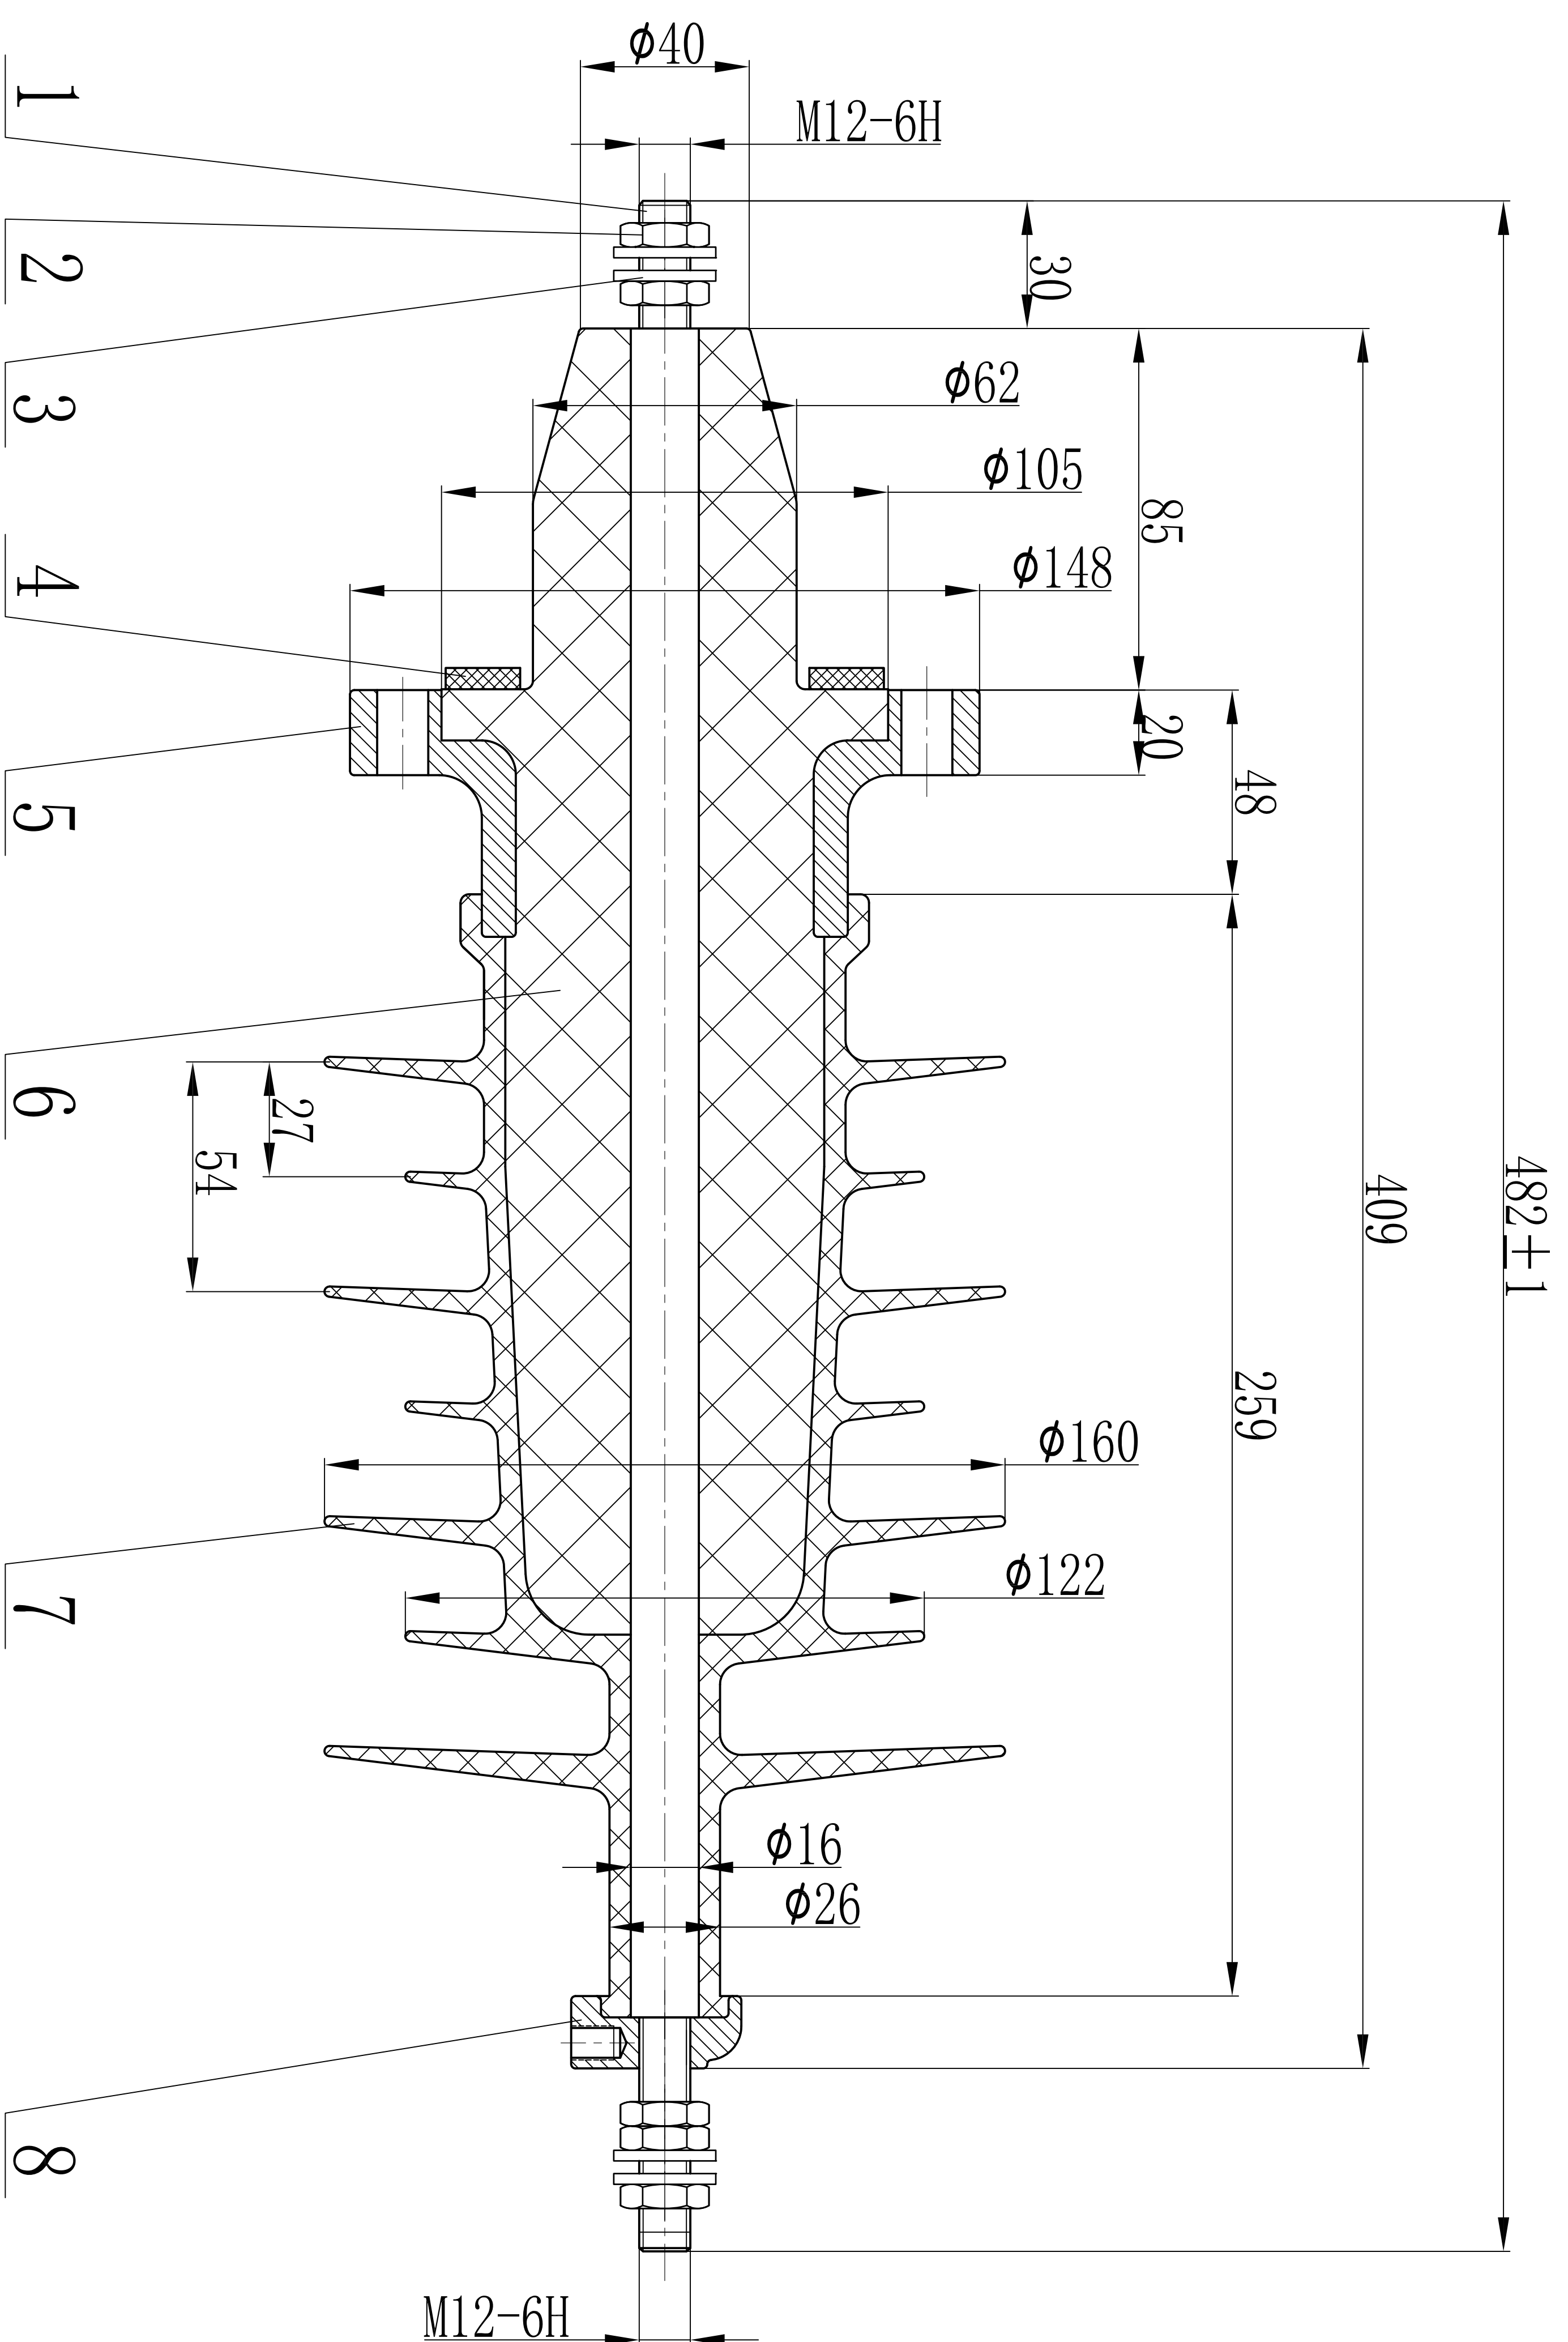

Technical Specifications

1. Rated voltage:24 kV;
2. Rated current:250 A;
3. Power-frequency withstand voltage (wet/dry):45/50 kV;
4. Dry lightning impulse withstand voltage:110 kV;
5. Creepage distance no less than:600 mm;
6. Applied 20.8kV, Partial discharge value less than 10pc;
7. Colour:gray;
8. Pollution level:P2.

8	CUP	1	NICKEL PLATED BRASS	
7	EXTERNAL PART	1	SILICON RUBBER	
6	INTERNAL BODY	1	EPOXY RESIN	
5	FLANGE	1	ALUMINIUM	
4	GASKET THICKNESS	5	NITRILE RUBBER	
3	WASHERS ϕ 12	4	NICKEL PLATED BRASS	
2	NUTS M12	5	NICKEL PLATED BRASS	
1	BOLT	1	RED COPPER	
POS	DESCRIPTION	Q. ty	MATERIAL	
DESIGNED	POLYMER TYPE 24kV/250A 600 CD BUSHING		DWG NO.G-Z200826CQTG1	
CHECKED			Unit	Rev
APPROVED			mm	1
DATE	ASSEMBLY DRAWING		GreenGrid Power Technology Co., Ltd.	